


XLU 25-1 R

for **Miyano**

6'000 min -1 / rpm
i = 1:1




Radial-Bohr-Fräseinrichtung
Radial Drilling and Milling Unit
Unità radiale di foratura e fresatura
Unité de perçage et de fraisage radial

Externe Kühlung EKZ
P max. = 70 bar

External coolant supply ECS
Coolant pressure max. = 70 bar

Liquido refrigerante esterno LRE
Pressione max. = 70 bar

Arrosage par l'extérieur APE
Pression max. = 70 bars

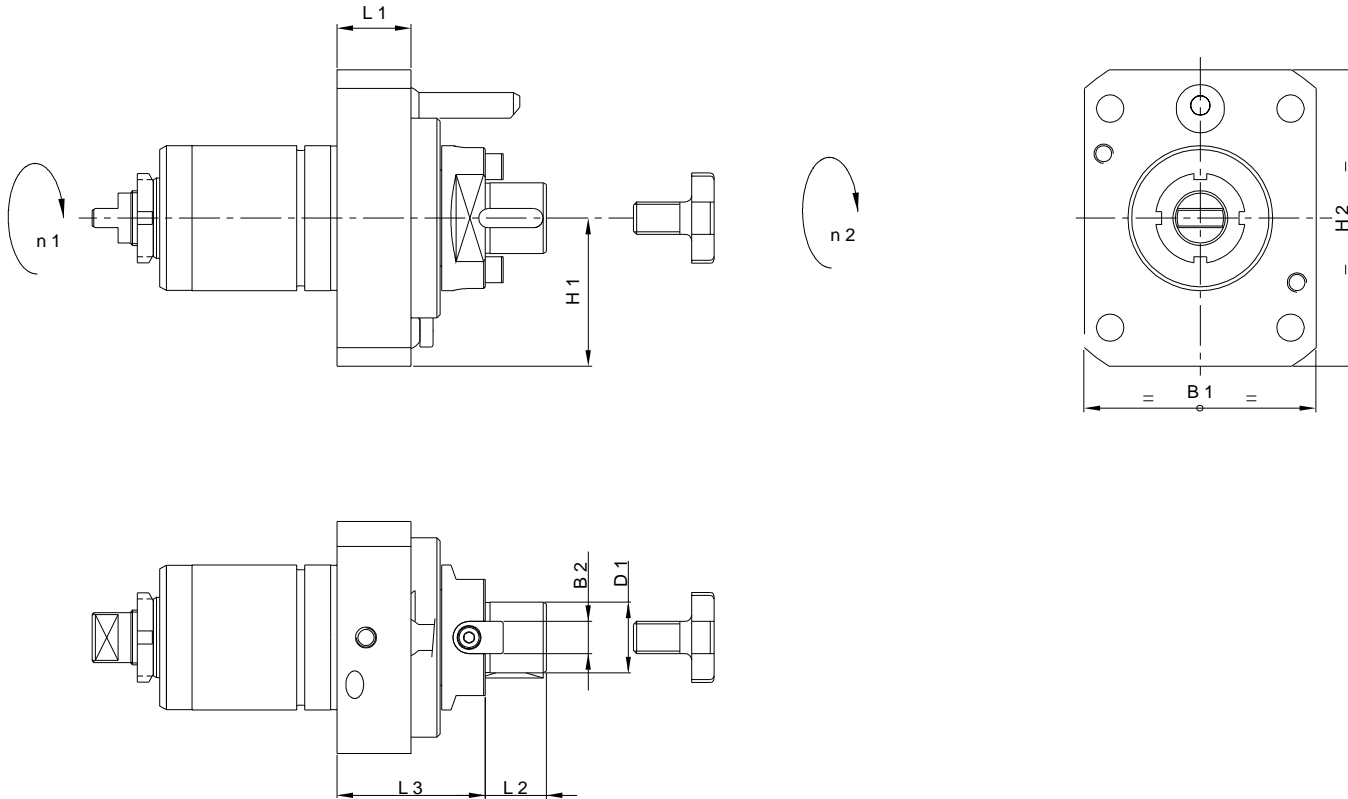

Machine Types

ABX 51 TH2 BND 51 SY2
ABX 64 TH2 BNE 51 MSY
ABX 51 TH3 BNJ 42 SY
ABX 64 TH3 BNJ 51 SY

	Bestell-Nr. Ref. No.	Radialkopf Radial Head	L 1	L 2	L 3	H 1	H 2	B 1	B 2	D 1	Nm max.	Schmierung Lubrication	rpm max. min -1	i n 1 : n 2	Zubehör Accessory	Page
A	14101001440	XLU 25-1-R Ø 22 mm	23	19	46	46	92	72	10	22	25	Fettschmierung Lubricant grease	6'000	1 : 1	Spannschlüssel / Spanners Hochdruck Kühlrohr / High pressure coolant pipe	019 020