
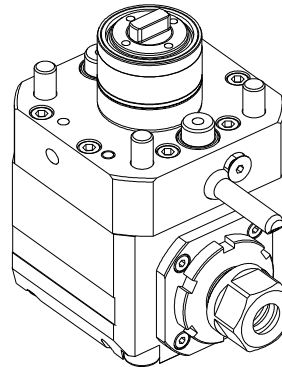
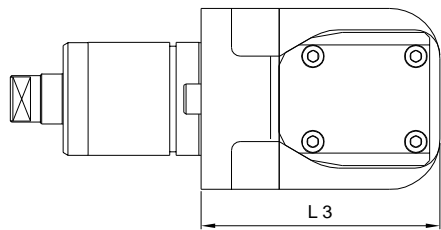
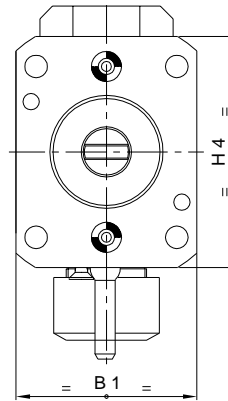
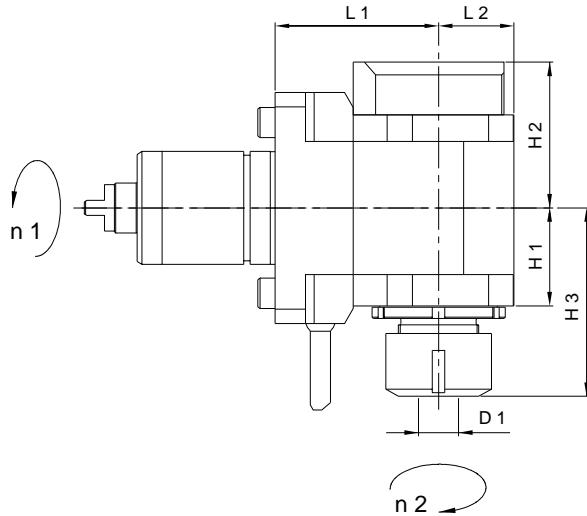


ZAU 25-1 A

for **Miyano**

6'000 min⁻¹ / rpm
i = 1:1



Axial-Bohr-Fräseinrichtung
Axial Drilling and Milling Unit
Unità assiale di foratura e fresatura
Unité de perçage et de fraisage axial

Externe Kühlung **EKZ**
P max. = 70 bar
Interne Kühlmittelzuführung **IKZ**
kein Trockenlauf!

External coolant supply **ECS**
Coolant pressure max. = 70 bar
Coolant through the spindle **CTS**
Don't run without coolant!

Liquido refrigerante esterno **LRE**
Pressione max. = 70 bar
Liquido refrigerante sul fuso **LRF**
Non lavorare a secco!

Arrosage par l'extérieur **APE**
Pression max. = 70 bar
Arrosage par le centre **APC**
Ne pas tourner sans arrosage!

Machine Types

ABX 51 TH2 BND 51 SY2
ABX 64 TH2 BNE 51 MSY
ABX 51 TH3 BNJ 42 SY
ABX 64 TH3 BNJ 51 SY

	Bestell-Nr. IKZ Ref. No. CTS	Bestell-Nr. EKZ Ref. No. ECS	Axialkopf Axial Head	L 1	L 2	L 3	H 1	H 2	H 3	H 4	B 1	D 1 max.	Nm max.	Schmierung Lubrication	rpm max. min ⁻¹	i n 1 : n 2	Zubehör Accessory	Page
A	14800002230		ZAU 25-1 A Hi-Q / ERC 25	65	30	95	39	58	75	92	72	16	25	Fettschmierung Lubricant grease	6'000	1 : 1	Spannzangen / Collets Dichtscheiben / Sealing Disks	018 018
B		14800001900	ZAU 25-1 A Hi-Q / ER 25	65	30	95	39	46	70	92	72	16	25	Fettschmierung Lubricant grease	6'000	1 : 1	Spannschlüssel / Spanners Hochdruck Kühlrohr / High pressure coolant pipe	019 020