

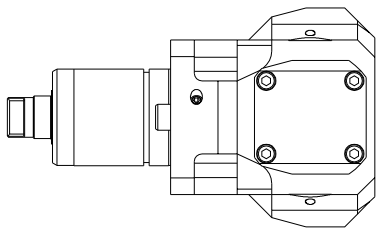
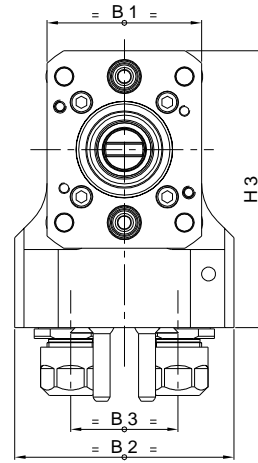
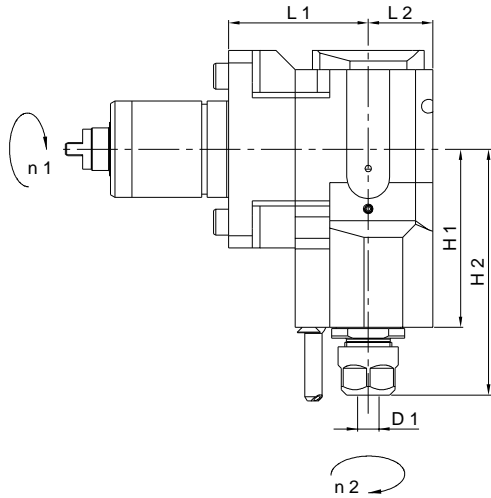


**ZAU 25-2 A**

for **Miyano**

**6'000 min<sup>-1</sup> / rpm**  
**i = 1:1**



Axial-Bohr-Fräseinrichtung Drilling and Milling Axial Unit Testa ad assiale di foratura e fresatura Unité de perçage et de fraisage axial	
Externe Kühlung Interne Kühlmittelzuführung P max. = 25 bar <b>kein Trockenlauf!</b>	EKZ IKZ
External coolant supply Coolant through the spindle Coolant pressure max. = 25 bar <b>Don't run without coolant!</b>	ECS CTS
Liquido refrigerante esterno Liquido refrigerante sul fuso Pressione max. = 25 bar <b>Non lavorare a secco!</b>	LRE LRF
Arrosage par l'extérieur Arrosage par le centre Pression max. = 25 bars <b>Ne pas tourner sans arrosage!</b>	APE APC

<b>Machine Types</b>	
ABX 51 TH2	BND 51 SY2
ABX 64 TH2	BNE 51 MSY
ABX 51 TH3	BNJ 42 SY
ABX 64 TH3	BNJ 51 SY

	Bestell-Nr. Ref. No.	Axialkopf Axial Head	L 1	L 2	H 1	H 2	H 3	B 1	B 2	B 3	D 1 max.	Nm max.	Schmierung Lubrication	rpm max. min <sup>-1</sup>	i n 1 : n 2	Zubehör Accessory	Page
A	14801001020	ZAU 25-2 A Hi-Q / ERC 16	65	30	39	75	110.5	72	102	50	10	25	Fettschmierung Lubricant grease	6'000	1 : 1	Spannzangen / Collets Dichtscheiben / Sealing Disks Spannschlüssel / Spanners Hochdruck Kühlrohr / High pressure coolant pipe	018 018 019 020