
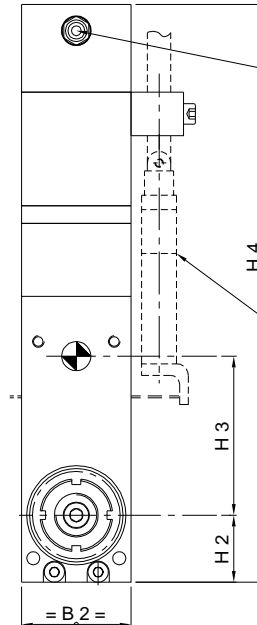
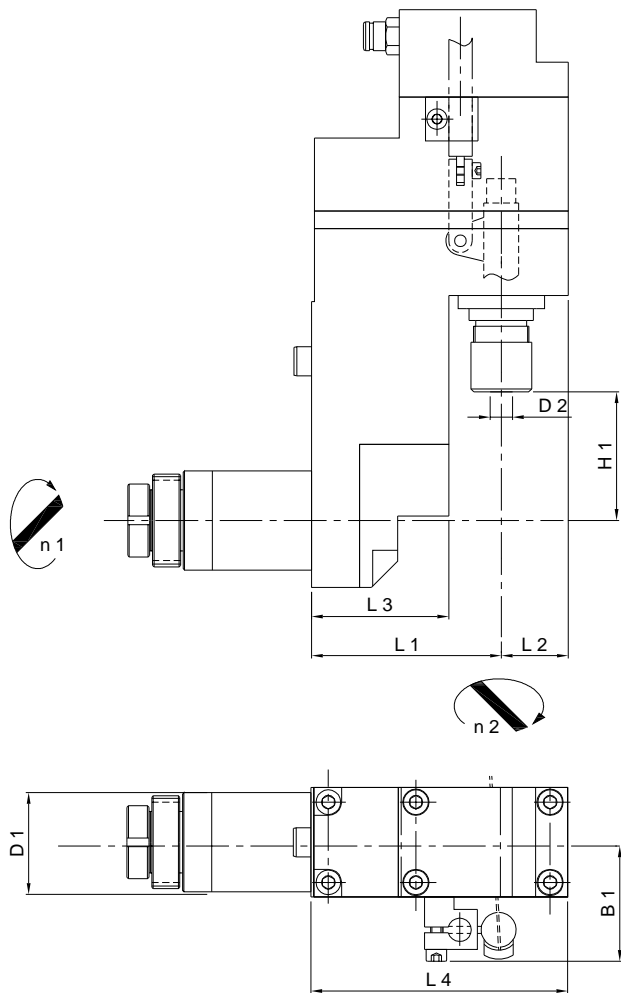


**Star LAUO 8-1 A**

**5'700 min -1 / rpm**  
**i = 1:1**



Kühlmitteleingang  
Input coolant  
Entrata refrigerante  
Entrée arrosage

Der Dedektor ist im Lieferumfang nicht enthalten!  
The dedector isn't included in the delivery!  
La dedector non fa parte della fornitura!  
Ladéducteur de tronçonnage n'est pas comprise dans la livraison!

Winkel-Fräskopf Right angle milling unit Unità di foratura e fresatura Unité de fraisage angulaire	
Interne Kühlmittelzuführung P max. = 100 bar <b>kein Trockenlauf!</b>	IKZ
Coolant through the spindle Coolant pressure max. = 100 bar <b>Don't run without coolant!</b>	CTS
Liquido refrigerante sul fuso Pressione max. = 100 bar <b>Non lavorare a secco!</b>	LRF
Arrosage par le centre Pression max. = 100 bars <b>Ne pas tourner sans arrosage!</b>	APC

<b>Machine Types</b>	
SR-20RII	SR-20RIV
SR-20RIII	SW-20
<b>Auch einsetzbar auf / Also usable on</b>	
-	

Ref. No. Star	Ref. No. Su-matic	Winkel-Fräskopf Milling Angle Head	L 1	L 2	L 3	L 4	H 1	H 2	H 3	H 4	B 1	B 2	D 1	D 2 max.	Nm max.	Schmierung Lubrication	rpm max. min -1	i n 1 : n 2	Zubehör Accessory	Page
A	-	LAUO 8-1 A Hi-Q / ER 16	65	23	47	88	44	23	54.5	198	40.75	37.5	34.0	10	8	Fettschmierung Lubricant grease	5'700	1 : 1	-	