
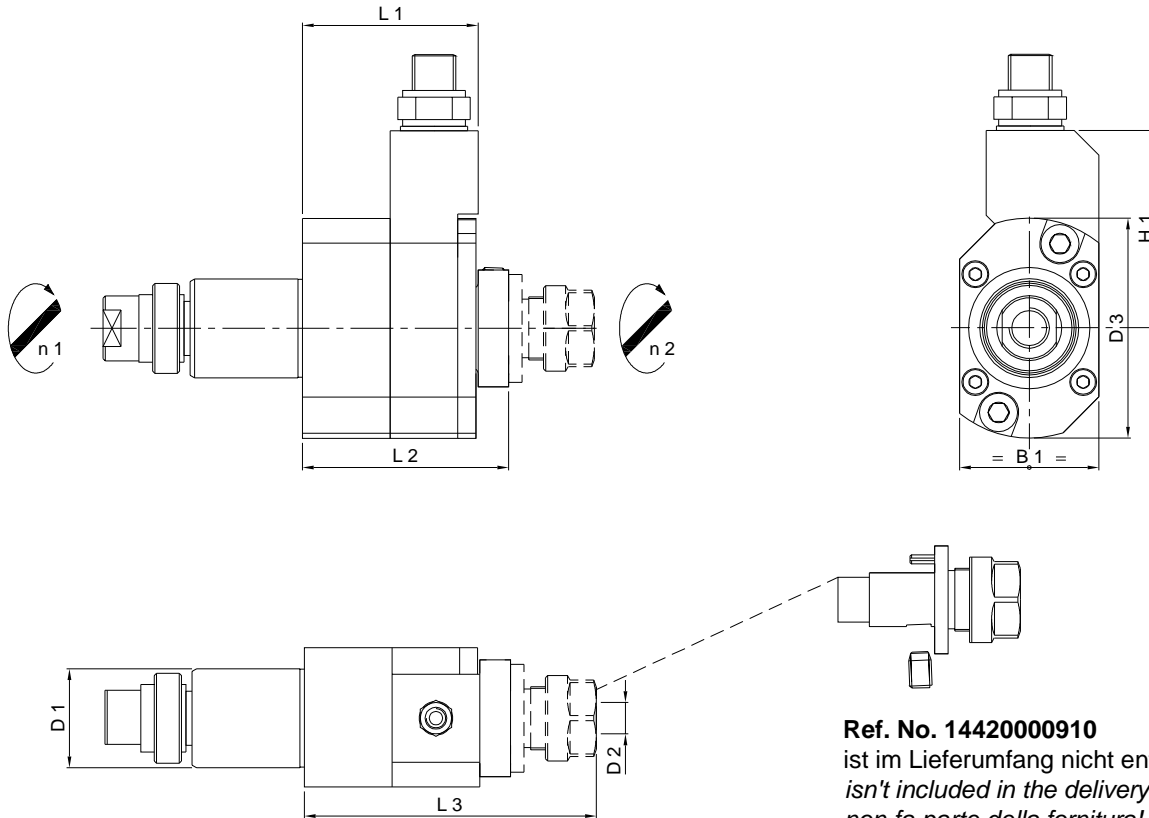


Star LLU 12-1 A

8'000 min -1 / rpm
i = 1:1



Ref. No. 14420000910
ist im Lieferumfang nicht enthalten!
isn't included in the delivery!
non fa parte della fornitura!
n'est pas comprise dans la livraison!

Radial-Bohr-Fräseinrichtung Radial Drilling and Milling Unit Unità radiale di foratura e fresatura Unité de perçage et de fraisage radial	
Interne Kühlmittelzuführung P max. = 50 bar kein Trockenlauf!	IKZ
Coolant through the spindle Coolant pressure max. = 50 bar Don't run without coolant!	CTS
Liquido refrigerante sul fuso Pressione max. = 50 bar Non lavorare a secco!	LRF
Arrosage par le centre Pression max. = 50 bars Ne pas tourner sans arrosage!	APC

Machine Types	
SR-25J	SR-32J N
SR-32J	
Auch einsetzbar auf / Also usable on	
ECAS-12	
ECAS-20	
SR-20J C	
SR-20J N	
SR-20RII	
SR-20RIII	

Ref. No. Star	Ref. No. Su-matic	Radialkopf Radial Head	L 1	L 2	L 3	H 1	B 1	D 1	D 2 Ø max.	D 3	Nm max.	Schmierung Lubrication	rpm max. min -1	i n 1 : n 2	Zubehör Accessory	Page	
A	571-61/CTS	14101000920	LLU 12-1 A PTSS12 Hi-Q / ER 11	39.1	45.9	65	44	31	22	7	49	13	Fettschmierung Lubricant grease	8'000	1 : 1	Spannzangen / Collets Dichtscheiben / Sealing Disks	012 012