


muratec LLU 40-1 R ER25

6'000 min⁻¹ / rpm
i = 1:1







Radial-Bohr-Fräseinrichtung
Drilling and Milling Radial Unit
Testa radiale di foratura e fresatura
Unité de perçage et de fraisage radial

Externe Kühlung EKZ
Interne Kühlmittelzuführung IKZ
P max. = 30 bar
kein Trockenlauf!

External coolant supply ECS
Coolant through the spindle CTS
Coolant pressure max. = 30 bar
Don't run without coolant!

Liquido refrigerante esterno LRE
Liquido refrigerante sul fuso LRF
Pressione max. = 30 bar
Non lavorare a secco!

Arrosage par l'extérieur APE
Arrosage par le centre APC
Pression max. = 30 bars
Ne pas tourner sans arrosage!

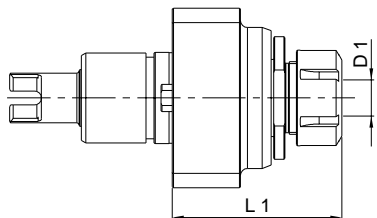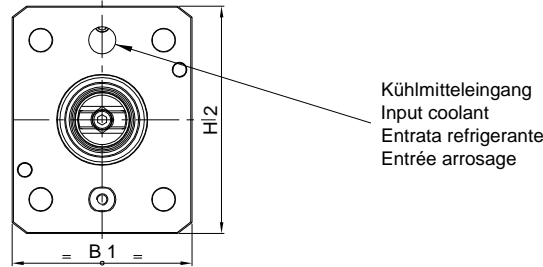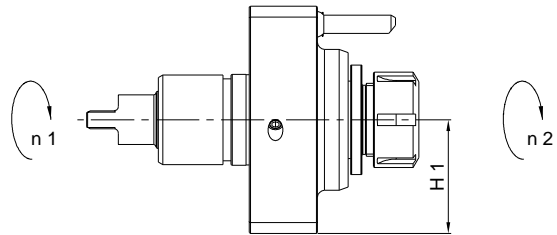

	Bestell-Nr. IKZ Ref. No. CTS	Bestell-Nr. EKZ Ref. No. ECS	Radialkopf Radial Head	L 1	H 1	H 2	B 1	D 1 Ø max.	Nm max.	Schmierung Lubrication	rpm max. min ⁻¹	i n 1 : n 2	Zubehör Accessory	
A	14.101.0.0177.0	-	LLU 40-1 R Hi-Q / ER25	74.5	50	100	79	16	40	Fettschmierung Lubricant grase	6'000	1:1	Spannzangen / Dichtscheiben / Collets / Sealing Disks Schlüssel / Spanners	Page 76 Page 77